



VRX 35 AND 35-S WINCH

All-new winch, all-new levels of performance and reliability

The WARN VRX™ 35 and VRX 35-S offer premium features and outstanding value. They're perfect for both larger ATVs as well as sport Side x Sides. Features include all-metal, IP68 waterproof construction, an all-metal gear train, and a new clutch design based on WARN 4WD hub lock know-how. Whether on the trail or on the farm or ranch, the VRX 35 and VRX 35-S will let riders get more done.


- VRX 35 includes 50' of durable 7/32" steel rope, roller fairlead, and zinc-plated hook
- VRX 35-S includes 50' of lightweight, easy-to-handle 3/16" synthetic rope, hawse fairlead, and zinc-plated hook
- Complete IP68 waterproof sealing keeps all the elements out
- Hard-working 3,500 lb. capacity
- Semi-gloss black powder-coated finish and stainless steel fasteners for corrosion resistance
- New clutch design based on legendary WARN 4WD hub lock know-how
- Load-holding mechanical brake for great control
- Durable all-metal construction
- Smooth and reliable all-metal three-stage planetary gear train
- Handlebar-mounted rocker switch
- Limited lifetime warranty (mechanical), 3 year warranty (electrical)



VRX 35, PN 101035 VRX 35-S, PN 101030

WARN® VRX™ POWERSPORTS WINCHES

PREMIUM FEATURES WITHOUT THE PREMIUM PRICE

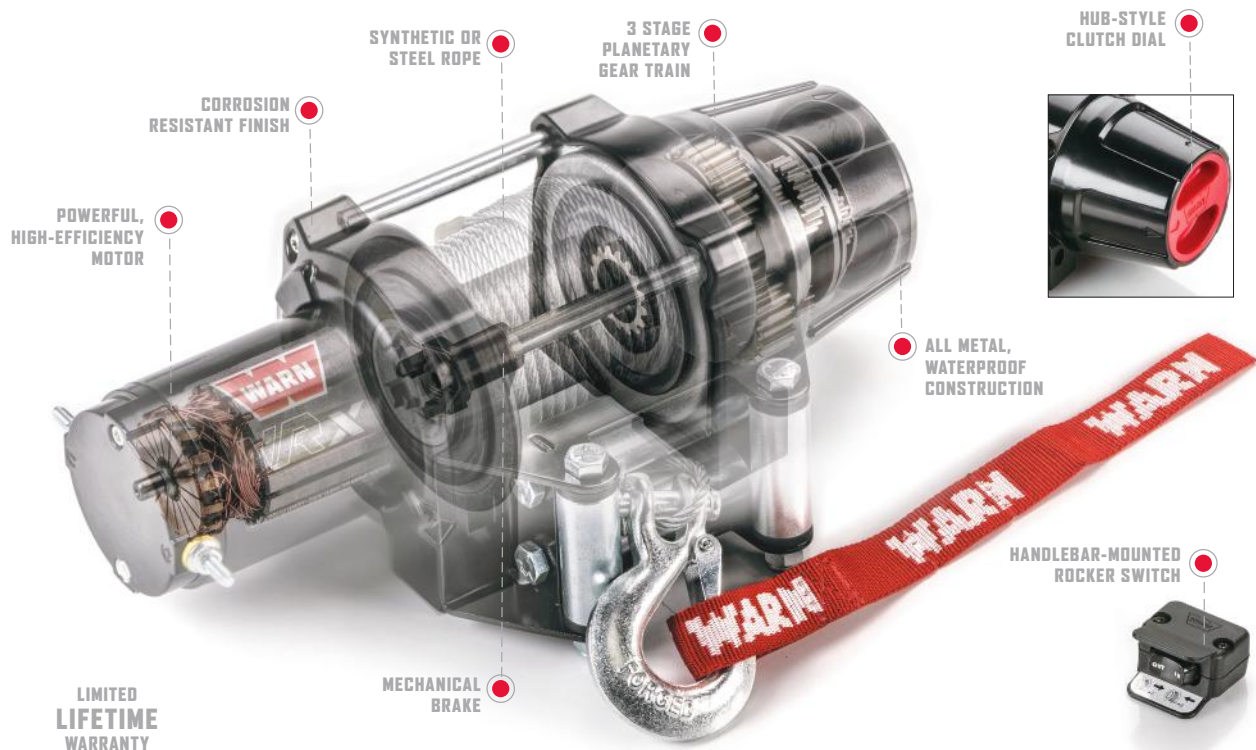

SPECIFICATIONS

Winch model: VRX 35 or VRX 35-S

Part numbers: 101035 (VRX 35), 101030 (VRX 35-S)

Rated line pull: 3500 Lbs. (1588 kg) single-line

Motor: 12V DC permanent magnet

Sealing: IP68 waterproof

Geartrain: 3-stage planetary

Fasteners: All stainless steel

Rope: VRX 35: 50' x 7/32" (15m x 5.5mm) steel,
VRX 35-S: 50' x 3/16" (15m x 4.8mm) synthetic

Hook: Zinc Plated

Fairlead: VRX 35: Roller, VRX 35-S: Cast aluminum hawse

Primary Control: Handlebar-mounted rocker switch


Remote Control: Sold Separately

Brake: Mechanical brake

Mechanical Warranty: Limited lifetime

Electrical Warranty: 3 year

Line Pull Lbs. (Kg)	Line Speed Ft./min. (M/min.)	Motor Current	Pull by layer: layer/Lbs. (kg)
0	15.8 (4.8)	20 amps	1/3500 (1588)
500 (227)	13.4 (4.1)	41 amps	2/2934 (1331)
1000 (454)	11.2 (3.4)	60 amps	3/2525 (1145)
1500 (680)	9.3 (2.8)	79 amps	4/2216 (1005)
2000 (907)	7.6 (2.3)	100 amps	5/1975 (896)
2500 (1134)	6.2 (1.9)	124 amps	
3000 (1361)	5.0 (1.5)	155 amps	
3500 (1588)	4.0 (2.1)	192 amps	

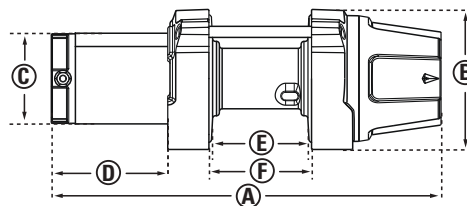

A 13.2" (335.3mm)	D 3.94" (100.2mm)
B 4.74" (120.5mm)	E 3.30" (83.9mm)
C 3.07" (78 mm)	F 3.5" (88.9mm)

Mounting bolt pattern: 3.0" x 4.87" (76mm x 124mm)

WARN INDUSTRIES, INC.

12900 S.E. Capps Road, Clackamas, OR USA 97015-8903 warn.com

Customer Service (North America): 1-800-543-9276 International Sales Support: +1 503 722 1200

